

Chatter **Box!** TM



XBI ^{2-H}



 **Bluetooth**



XBi 2-H



ChatterBox! strives to provide our customers with powerful and reliable communication systems that offer state-of-the-art technology and cutting edge design. Every communication system in the ChatterBox! product line provides unique features and benefits along with communication compatibility within the entire product range. Each ChatterBox! system is manufactured to exacting standards infusing affordable price, multiple mounting options, intuitive accessories, crystal clear reception, maximum range, compact design and quality. Innovation, rigorous testing protocols, and outstanding customer service are all top priority at ChatterBox!



CONTENTS

1. KIT INCLUDES 1

2. XBi2-H DESCRIPTION 2

- 2.1 EXTERIOR DESIGN 2
- 2.2 DESIGN DESCRIPTION 2
 - 2.2.1 POWER BUTTON 2
 - 2.2.2 MODE BUTTON 2
 - 2.2.3 VOLUME UP BUTTON 2
 - 2.2.4 VOLUME DOWN BUTTON 2
 - 2.2.5 INTERCOM BUTTON 2
 - 2.2.6 CHARGE PORT 2
 - 2.2.7 LED 2
 - 2.2.8 RELEASE TABS 2

3. GENERAL INSTALLATION 3

4. BASIC UNIT OPERATION 5

- 4.1 CHARGING XBi2-H UNIT 5
- 4.2 TURNING XBi2-H UNIT ON / OFF 5
 - 4.2.1 TURNING ON 5
 - 4.2.2 TURNING OFF 5
- 4.3 BATTERY LEVEL STATUS DISPLAY 5
- 4.4 LOW BATTERY ALERT 5
- 4.5 ADJUSTING UNIT VOLUME 5

5. BLUETOOTH® PAIRING OPERATION 6

- 5.1 PUTTING XBi2-H INTO BLUETOOTH® PAIRING MODE 6
- 5.2 PAIRING XBi2-H UNITS TOGETHER 6
 - 5.2.1 PAIRING 3 XBi2-H UNITS TOGETHER – RIDER 1: (MAIN) RIDER 2: (SATELLITE1) RIDER 3: (SATELLITE 2) 6
 - 5.2.2 PAIRING 2 XBi2-H UNITS TOGETHER – RIDER 1: (MAIN) RIDER 2: (SATELLITE 1) 6

6. FUNCTION OPERATION 7

- 6.1 BLUETOOTH® AUDIO OPERATION 7
 - 6.1.1 PAIRING A STEREO BLUETOOTH® ADAPTOR 7
 - 6.1.2 SWITCHING FROM INTERCOM MODE TO AUDIO MODE 7
- 6.2 BLUETOOTH® PHONE OPERATION 7
 - 6.2.1 PAIRING A BLUETOOTH® COMPATIBLE PHONE 7
 - 6.2.2 ANSWERING A PHONE CALL 7
 - 6.2.3 PLACING A PHONE CALL 7
 - 6.2.4 PLACING A LAST NUMBER DIALED CALL 8

7. BLUETOOTH® CONNECTING OPERATION 8

- 7.1 CONNECTING A PAIRED STEREO BLUETOOTH® ADAPTOR 8
- 7.2 CONNECTING A PAIRED BLUETOOTH® PHONE 8
- 7.3 CONNECTING A PAIRED STEREO BLUETOOTH® ADAPTOR AND PAIRED BLUETOOTH® PHONE AT THE SAME TIME 8

8. SPECIFICATION 9

- 8.1 ELECTRICAL SPECIFICATION 9
- 8.2 BUTTON FUNCTION SUMMARY 10

9. LIMITED WARRANTY 11

- 9.1 LIMITED WARRANTY 11


10. LICENSE INFORMATION 11

- 10.1 FCC ID# LSMXB12H 11
- 10.2 EUROPEAN CE NOTICE 11
- 10.3 DECLARATION OF CONFORMITY (DOC) 11
- 10.4 WARNING 11

11. FREQUENTLY ASKED QUESTIONS 12


1. KIT INCLUDES

NO.	DESCRIPTION	Q'TY
1	XBi2-H Unit	1
2	AC Home Charger	1
3	Open Face Headset	1
4	Pre-Installed Lithium-Polymer Battery	1
5	Phillip Screw	1
6	Sticky Back Velcro Discs	2
7	Microphone Clips	2
8	User Manual	1

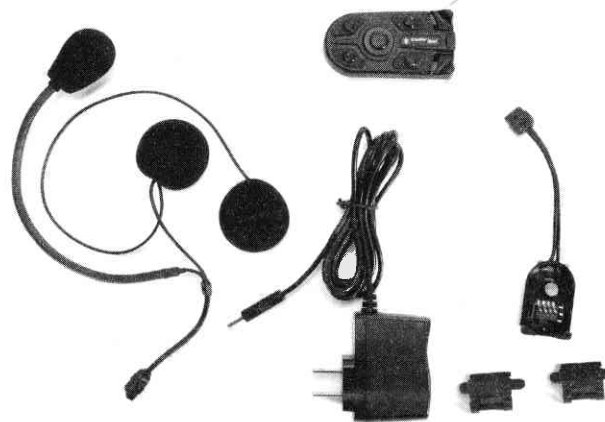

2. XBi2-H DESCRIPTION

2.1 EXTERIOR DESIGN

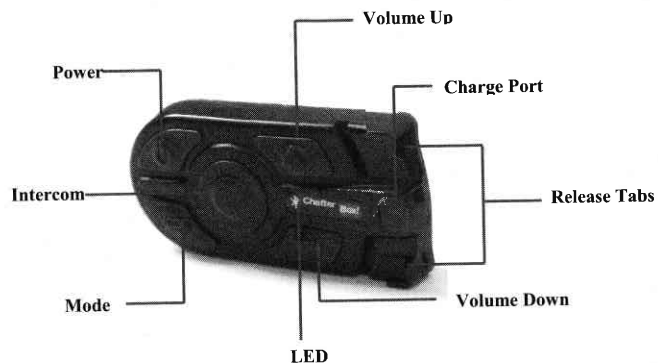

2.2 DESIGN DESCRIPTION

2.2.1 POWER BUTTON

- * Power ON/OFF main unit
- * BLUETOOTH® pairing Mode
- * When the BLUETOOTH® phone is connected, use hands-free mode (Answer/Hang up phone call)
- * GROUP INTERCOM pairing mode (with MODE button)

2.2.2 MODE BUTTON

- * GROUP INTERCOM pairing mode (with POWER button)

2.2.3 VOLUME UP BUTTON

- * Audio volume increase

2.2.4 VOLUME DOWN BUTTON

- * Audio volume decrease

2.2.5 INTERCOM BUTTON

- * Switch from intercom mode to audio mode

2.2.6 CHARGE PORT

- * Charge cord port

2.2.7 LED

- * RED = Primary Function = XBi2 unit On/Off Status
Secondary Function = GROUP INTERCOM pairing status
- * BLUE = Primary Function = BLUETOOTH® status
Secondary Function = Charging status

2.2.8 RELEASE TABS


- * Remove the XBi2-H off the helmet

3. GENERAL INSTALLATION


1. Open the chin bar and remove the left cheek pad



2. On the left side of the helmet remove the protective plastic plate. Unscrew the Phillips screw to remove the pre installed cradle behind the recess hole.



3. Grab cradle from the main kit and install it behind the recess hole.

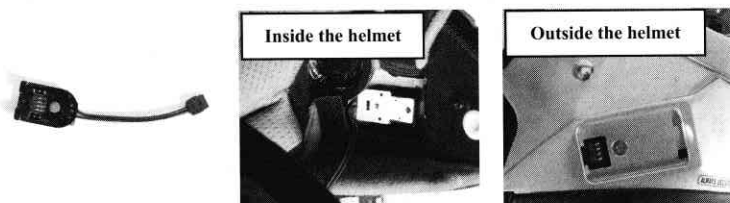


4. Put the helmet aside and grab the left cheek pad and the two microphone clips



5. On the back side of the left cheek pad there will be four identical pre cut holes



6. Grab one microphone clip and insert the longer end into hole #2 and the shorter end into hole #1. Grab the second microphone clip and insert the longer end into hole #4 and shorter end in hole #3

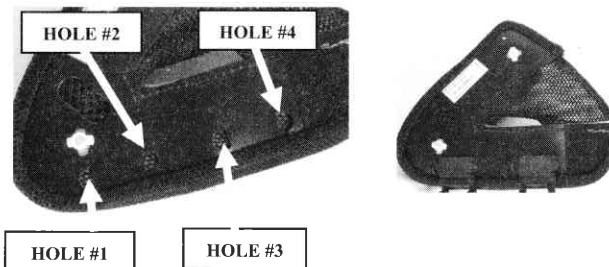

7. Grab the microphone and snap in the boom mic into the microphone clips



8. Before reinstalling the left cheek pad connect the 4 pin connectors together. (Cradle and the headset). After connecting the connectors reinstall the left cheek pad. Now install the speakers behind the cheek pad pockets. Hide the wires behind the helmet lining. (Short cord is the left speaker and the longer cord is the right speaker.) *For optimum sound quality, position the speakers directly by the ears (see photo). (location might vary for each person)



4. BASIC UNIT OPERATION

4.1 CHARGING XBi2-H UNIT

1. XBi2-H unit must be turned off
2. Plug charger into household power supply, then plug charge cord into the charge port of the XBi2-H
3. LED display on the XBi2-H / charger
 - **XBi2-H unit**
BLUE LED will remain on until XBi2-H is fully charged
 - **Charger**
RED LED- XBi2-H is charging
4. For a complete charge it will take approximately 1-1 1/2 hours

4.2 TURNING XBi2-H UNIT ON / OFF

4.2.1 TURNING ON

1. Press and hold the Power button until LED lights remain steady RED
2. Release the Power button
3. LED will now alternate flashing BLUE & RED continuously

4.2.2 TURNING OFF

1. Press and hold the Power button until LED lights remain steady RED
2. A two-tone sound will be heard
3. Release Power button
4. LED will now be off

4.3 BATTERY LEVEL STATUS DISPLAY

1. Press the Power Button around 1 second, RED LED will stay "ON" then release the Power button.
2. Please refer to the table below for BATTERY LEVEL STATUS

NO.	LEVEL	STATUS	VOLTAGE [V]	BLUE LED
1	3/3	BATTERY Full	Over 3.86V	3 times ON/OFF
2	2/3	BATTERY 2/3	3.54V~3.86V	2 times ON/OFF
3	1/3	BATTERY 1/3	3.34V~3.54V	1 time ON/OFF
4	0/3	Low BATTERY ALERT	Below 3.34V	1 time ON/OFF

4.4 LOW BATTERY ALERT

1. If the voltage of the main unit is entering $+3.2 \text{ V} \pm 0.1 \text{ V}$, you will hear 1 alarm beep sound from the speaker.
2. After the first beep, if the voltage is entering $+3.1 \text{ V} \pm 0.1 \text{ V}$, the power will turn OFF automatically

4.5 ADJUSTING UNIT VOLUME

1. XBi2-H unit will be at middle volume level whenever unit is turned on
2. Momentarily press (approximately 1 second) and release the volume button
3. A single tone sound will be heard for each level
4. At maximum volume level a two tone sound will be heard

5. BLUETOOTH® PAIRING OPERATION

5.1 PUTTING XBI2-H INTO BLUETOOTH® PAIRING MODE

1. Start with XBi2-H unit off
2. Press and hold Power button until LED light is steady RED then after approximately 6 seconds LED will start to flash BLUE
3. Release Power button and the XBi2-H is now in Bluetooth® pairing mode

5.2 PAIRING XBI2-H UNITS TOGETHER

*** MAIN UNIT MUST BE ON AT ALL TIMES TO COMMUNICATE BIKE-TO-BIKE***

5.2.1 PAIRING 3 XBI2-H UNITS TOGETHER – RIDER 1: (MAIN) RIDER 2: (SATELLITE) RIDER 3: (SATELLITE 2)

1. Turn on Main, Satellite (1), and Satellite (2) units on
2. Get the Main unit. Press & hold the Power button and Mode button simultaneously (3 seconds)
3. LED will start to flash RED and occasional BLUE after 3 seconds
4. Release both Power button and Mode button
5. Now get the Satellite (1) unit. Quickly Press & release the Power button and Mode button simultaneously (less than 1 second) *
6. LED will quickly flash and turn off in approximately 1 second
7. Immediately get the Satellite (2) unit. Quickly Press & release the Power button and Mode button simultaneously (less than 1 second) *
8. LED will quickly flash and turn off in approximately 1 second
9. The Main unit will turn itself off 8-10 seconds after both Satellite (1) and Satellite (2) units are off
10. If pairing sequence was done correctly all three units will turn themselves off
First: Satellite (1)
Second: Satellite (2)
Third: Main
11. Pairing is now complete, XBi2-H units are now paired and will connect to each other automatically when units are on and within range of each other

5.2.2 PAIRING 2 XBI2-H UNITS TOGETHER – RIDER 1: (MAIN) RIDER 2: (SATELLITE 1)

1. Turn both Main and Satellite unit on
2. Get the Main unit. Press & hold the Power button and Mode button simultaneously (3 seconds)
3. LED will start to flash RED and occasional BLUE after 3 seconds
4. Release both Power button and Mode button
5. Now get the Satellite unit. Quickly press & release the Power button and Mode button simultaneously (less than 1 second) *
6. LED will quickly flash and turn off in approximately 1 second
7. The main unit will turn itself off 8-10 seconds after the Satellite unit is off
8. If pairing sequence was done correctly both units will turn themselves off
First: Satellite
Second: Main
9. Pairing is now complete, XBi2-H units are now paired and will connect to each other automatically when units are on and within range of each other

* Do not delay the process or the XBi2-H units will go on timeout mode and need to start pairing process over

6. FUNCTION OPERATION

6.1 BLUETOOTH® AUDIO OPERATION

6.1.1 PAIRING A STEREO BLUETOOTH® ADAPTOR

1. Put XBi2-H unit in Bluetooth® pairing mode (turn to 5.1)
2. Turn on audio source and connect Bluetooth® adaptor for pairing
3. Audio source will automatically start playing through XBi2-H unit when pairing is complete
4. XBi2-H unit is now paired with Bluetooth® adaptor. (Pairing process will no longer be needed to connect)

6.1.2 SWITCHING FROM INTERCOM MODE TO AUDIO MODE

1. Press the Intercom button around 1 second; it will switch from Audio mode to Intercom Mode. A 2 tone sound will be heard
2. Press the Intercom button around 2 second; it will switch from Intercom mode to Audio mode. A 4 tone sound will be heard

6.2 BLUETOOTH® PHONE OPERATION

** INTERCOM COMMUNICATION IS NOT AVAILABLE DURING PHONE USE**

6.2.1 PAIRING A BLUETOOTH® COMPATIBLE PHONE

1. Put XBi2-H unit in Bluetooth® pairing mode (turn to 5.1)
2. Press search for Bluetooth® devices button on phone
3. Select "XBi2-H" from phone device list
4. Enter pass code in phone (pass code will be "0000")
5. Press connect to "XBi2-H" on phone
6. XBi2-H unit is now paired to the phone. (Pairing process will no longer be needed to connect)

6.2.2 ANSWERING A PHONE CALL

1. When a phone call is received a 3 tone sound will be heard
2. Momentarily press (approximately 1 second) and release the Power button
3. Stereo audio source and/or intercom communication will be muted
4. Conduct phone call
5. To end call, momentarily press (approximately 1 second) and release the Power button
6. Stereo audio source and/or intercom communication will be restored

*** We do not recommend placing a phone call while riding**

6.2.3 PLACING A PHONE CALL *

1. Dial desired number and press talk or connect on phone keypad
2. Stereo audio source and/or intercom communication will be muted
3. Conduct phone call
4. To end call, momentarily press (approximately 1 second) and release the Power button
5. Stereo audio source and/or intercom communication will be restored

6.2.4 PLACING A LAST NUMBER DIALED CALL

1. Momentarily press (approximately 1 second) and release the Power button
2. Stereo audio source and/or intercom communication will be muted
3. Conduct phone call
4. To end call, momentarily press (approximately 1 second) and release the Power
5. Stereo audio source and/or intercom communication will be restored

7. BLUETOOTH® CONNECTING OPERATION

7.1 CONNECTING A PAIRED STEREO BLUETOOTH® ADAPTOR

1. Turn XBi2-H unit on
2. Turn on audio source and turn on or plug in stereo Bluetooth® adaptor
3. Audio source will automatically start playing through the XBi2-H unit when connection is complete

7.2 CONNECTING A PAIRED BLUETOOTH® PHONE

1. Turn XBi2-H unit on
2. Momentarily press (approximately 1 second) and release the Power button *
3. Bluetooth® symbol will light up on phone display
4. Press end call button on phone

7.3 CONNECTING A PAIRED STEREO BLUETOOTH® ADAPTOR AND PAIRED BLUETOOTH® PHONE AT THE SAME TIME

1. Turn XBi2-H unit on
2. Turn on audio source and turn on or plug in stereo Bluetooth® adaptor
3. Audio source will automatically start playing through the XBi2-H unit when connection is complete
4. Momentarily press (approximately 1 second) and release the Power button*
5. Bluetooth® symbol will light up on phone display
6. Press end call button on the phone

***When doing this procedure some phones will try to dial the last number dialed. Once connected be prepared to press the end call button on your phone**

8. SPECIFICATION

8.1 ELECTRICAL SPECIFICATION

NO	FUNCTION	SPECIFICATION		REMARK
1	Service Area	Bluetooth®	Within 10 m [Class 2]	-
		B-CDMA	Within 500 m [Class 1]	
2	Frequency Range	Bluetooth®	2402 MHz ~ 2480 MHz	-
		B-CDMA	2402 MHz ~ 2480 MHz	
3	Output Power	Bluetooth®	+ 3 dBm [Max 2.5mW]	Connection
		B-CDMA	+14 dBm ± [Max 20dBm = 100mW]	
4	Sensitivity Level	-82 dBm ~ -83 dBm		0.1% BER
5	Operation Voltage	+3.34V ~ +4.2 V		-
	Low Battery Detection	+3.34V ±0.1V Under		-
6	Current Consumption	Stand by	70mA	-
		Continuity	130 mA [Max-MP3 Play]	-
7	Audio Power	120 mW [Max Power]		@ 32
8	Operating Time	Stand by	around 7 hours	-
		Continuity	around 4 hours	-
9	Operating Temp	-10 ~ +55 °C		-
10	Battery	Li-Poly [530mA – PCM PCB built in]		-
11	Headset	Mic	15 PI, Dynamic Mic applied	-
		Speaker	Hi-Fi, 32Ω Load applied	-

8.2 BUTTON FUNCTION SUMMARY

NO	BUTTONS	DESCRIPTION	TIME	LED & BEEP	REMARK
1	Power	Power On	Less Than 1 Second	Red + Blue	Red LED On
		Power Off	More Than 5 Seconds	Red + Blue	Red LED On
		Hands-Free	Less Than 1 Second	-	Make Call, Answer Call
		Bluetooth® Pairing	More Than 7 Seconds	Blue	Entering Bluetooth® Pairing Mode
2	Power & Mode	Group Main	More Than 2 Seconds	Red [200ms]	Entering Group Intercom Pairing Mode [After Finish Unit Will Automatically Power Off]
		Group Satellite	Less Than 1 Second	Red [100ms]	
3	Mode	-	-	-	-
4	Volume Up	Volume Increase	Less Than 1 Second	1- Tone	Audio Output Power Increase [10 Levels]
5	Volume Down	Volume Decrease	Less Than 1 Second	1- Tone	Audio Output Power Decrease [10 Levels]
6	Intercom	Group Intercom Select	Less Than 1 Second	2- Tone	-
		Audio Mode Select	More Than 2 Seconds	4- Tone	Entering Audio Mode

9. LIMITED WARRANTY

9.1 LIMITED WARRANTY

ChatterBox! USA warrants that each new ChatterBox! will be free from defective materials and workmanship for a period of one (1) year from the date of original purchase. ChatterBox! USA will remedy any such defect by repair or replacement (at our discretion) of the product(s), provided they are delivered to the address listed below, intact for examination, with all transportation charges prepaid and accompanied by a copy of the original retail sales receipt. The provisions of this warranty shall not apply to any unit, which has been subject to misuse, neglect, incorrect installation, unauthorized modifications, accident or has been repaired or altered outside of our facilities. The express warranty contained herein is in lieu of all other warranties, expressed, implied or statutory, including without limitation any warranty of merchantability of fitness for a particular use. In no event will ChatterBox! USA be liable to the buyer for any damages, including special, incidental, indirect, or consequential.

ChatterBox! USA
16918 Edwards Road
Cerritos, CA 90703

10. LICENSE INFORMATION

10.1 FCC ID# LSMXB12H

* This device has been tested and found to comply with the limits for a class B digital device pursuant to part 15 of the FCC rules

* Operation is subject to the following two conditions

1. This device may not cause harmful interference
2. This device must accept any interference received including interference that may cause undesired operation

* Any changes or modifications not expressly approved by the parties responsible for compliance could void the users authority to operate this device

10.2 EUROPEAN CE NOTICE

* This device is in conformity with the following essential requirements of council directive 1999/5/EC articles 3.1a, 3.1b, and 3.2

* This device is manufactured in accordance with annex II of the above directive

10.3 DECLARATION OF CONFORMITY (DOC)

* This device is compliant with and adopts the Bluetooth® specification 2.0 and has successfully passed all interoperability tests that are specified in the Bluetooth® specification

* Interoperability between this devices and other Bluetooth® enabled products is not guaranteed

10.4 WARNING

* Please check all local laws and regulations regarding the use of in-helmet speakers while operating motorized vehicles

11. FREQUENTLY ASKED QUESTIONS

NO	QUESTIONS	ANSWERS
1	How many XBi2-H can communicate with each other?	You can have up to 3 XBi2-H units paired together.
2	What is the maximum range on the XBi2-H?	The XBi2-H can communicate up to 500 meters (1,640 Ft) in optimum conditions.
3	What happens when my unit doesn't want to turn off or freezes on me?	Open the case and unplug the battery for a couple of minutes for a hard reset.
4	Can I have multiple audio devices connected at one time? (GPS, MP3 or Radar)	No, the XBi2-H only supports 1 audio device via Bluetooth.
5	What has the highest priority?	Phone, Intercom and then Audio.
6	How do I know if my unit is taking a charge?	The Bluetooth icon will light up blue when it is charging and turn off when it is fully charged.
7	Do I need to worry if my unit gets wet while riding in the rain?	No, the XBi2-H is completely waterproof and will continue working.
8	Is the XBi2-H compatible with any other ChatterBox?	Yes, it is only backwards compatible with the XBi2.
9	What Bluetooth profiles will the XBi2-H support?	The XBi2-H supports the Headset Profile, Hands Free Profile and Advance Audio Distribution Profile.

*For any questions not answered in frequently asked questions section. Call us at our toll free number 1-888-452-2269

XBi^{2-H}



ChatterBox! ist ein Hersteller von leistungsstarken und zuverlässigen Kommunikationssystemen mit modernster Technologie und innovativem Design. Jedes Kommunikationssystem der ChatterBox!-Produktreihe bietet einzigartige Funktionen und Vorteile sowie kompatible Kommunikation mit der gesamten Produktpalette. Jedes ChatterBox!-System wird nach strikten Qualitätsstandards hergestellt und bietet verschiedene Montageoptionen, innovatives Zubehör, kristallklaren Empfang, maximale Reichweite, kompaktes Design und Qualität zu einem erschwinglichen Preis. Innovation, rigorose Testprotokolle und herausragender Kundenservice haben oberste Priorität bei ChatterBox!



ChatterBox! USA
16918 Edwards Road
Cerritos, CA 90703

ChatterBox! Europe
14 rue de l'atome
67800 Bischheim FRANCE

ChatterBox! Asia
Room 301 Sung Hee Bldg.
19-6 Yangjae-Dong
Seocho-Gu Seoul, KOREA

www.chatterboxusa.com
www.chatterboxeurope.com